


起重性能表 / LOAD DIAGRAMS

起重臂 (m) Jib	Rmin (m)	R (Cmax) (m)	Cmax (t)	幅度 (m) Range													
				15	20	25	30	35	40	45	50	55	60	65	70		
70m	⌋	3.5	36.39	6.00	6000						5351	4625	4044	3569	3173	2837	2550
	⌋⌋	3.5	19.53	12.0	12000	11688	9073	7330	6085	5151	4425	3844	3369	2973	2637	2350	
65m	⌋	3.5	37.86	6.00	6000						5616	4860	4256	3761	3349	3000	
	⌋⌋	3.5	20.32	12.0	12000	12000	9496	7683	6387	5416	4660	4056	3561	3149	2800		
60m	⌋	3.5	39.12	6.00	6000						5843	5062	4437	3926	3500		
	⌋⌋	3.5	21.00	12.0	12000	12000	9859	7985	6646	5643	4862	4237	3726	3300			
55m	⌋	3.5	40.46	6.00	6000						5274	4629	4100				
	⌋⌋	3.5	21.72	12.0	12000	12000	12000	8304	6920	5882	5074	4429	3900				
50m	⌋	3.5	41.65	6.00	6000						5465	4800					
	⌋⌋	3.5	22.36	12.0	12000	12000	12000	8590	7165	6096	5265	4600					
45m	⌋	3.5	42.81	6.00	6000						5650						
	⌋⌋	3.5	22.98	12.0	12000	12000	10918	8868	7403	6304	5450						
40m	⌋	3.5	40.00	6.00	6000												
	⌋⌋	3.5	23.26	12.0	12000	12000	11071	8995	7512	6400							
35m	⌋	3.5	35.00	6.00	6000												
	⌋⌋	3.5	23.49	12.0	12000	12000	11194	9098	7600								
30m	⌋	3.5	30.00	6.00	6000												
	⌋⌋	3.5	23.50	12.0	12000	12000	11197	9100									

不同基础的塔身组成和支座反力

/ TOWER COMPOSITION AND SUPPORT REACTION WITH DIFFERENT FOUNDATIONS

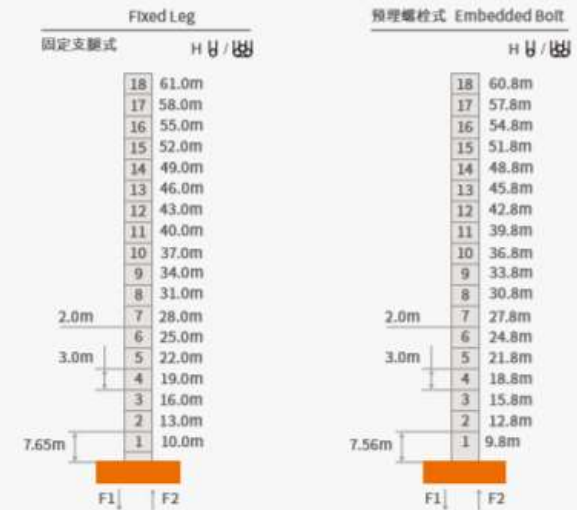

	固定支腿式 Fixed Leg		预埋螺栓式 Embedded Bolt	
	工况下 On-service	非工况下 Out-of service	工况下 On-service	非工况下 Out-of service
F1 (t)	153	181.3	153	181.3
F2 (t)	274	282.3	274	282.3