






Working Height Max.	10 m (32'10") 8 m (26'3")
Overall Lift Capacity Max.	230 kg (507 lb)
Overall Width	0.844 m (2'9")
Overall Length	2.48 m (8'2")
Overall Weight	2,200 kg (4,850 lb)

LS0808H

Electric Scissor Lift H-Drive

LS0808H SPECIFICATIONS >>>

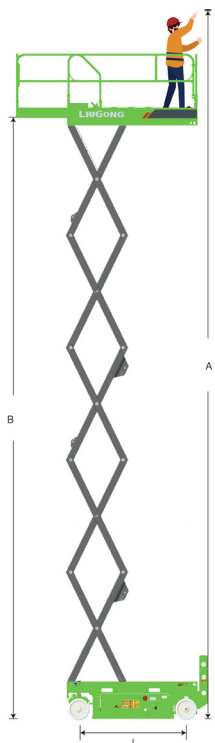

DIMENSIONS	
A. Working Height Max. (Indoor/Outdoor)	10 / 8 m (32'10" / 26'3")
B. Platform Height Max. (Indoor/Outdoor)	8 / 6 m (26'3" / 19'8")
C. Platform Height (Stowed)	1.22 m (4')
D. Platform Length	2.28 m (7'6")
E. Platform Width	0.81 m (2'8")
F. Extension Deck (Roll Out)	0.9 m (2'11")
G. Overall Length	2.48 m (8'2")
H. Overall Length (Without Ladder)	2.29 m (7'6")
I. Overall Width	0.844 m (2'9")
J. Stowed Height (Rails Up)	2.36 m (7'9")
K. Stowed Height (Rails Down)	1.8 m (5'11")
L. Wheelbase	1.88 m (6'2")
M. Ground Clearance (Pothole Raised)	100 mm (4")
N. Ground Clearance (Pothole Deployed)	20 mm (0.8")

PRODUCTIVITY	
Overall Lift Capacity Max.	230 kg (507 lb)
Extension Deck Capacity	113 kg (249 lb)
Platform Occupancy Max. (Indoor/Outdoor)	2 / 1
Drive Speed (Stowed)	2 km/h (1.2 mph)
Drive Speed (Raised)	0.4 km/h (0.2 mph)
Turning Radius (Inside/Outside)	0.24 / 2.2 m (9" / 7'3")
Lift/Lower Time	38 / 34 s
Gradeability	25 %
Tilt Sensor Activation	X 1.5° / Y 3°
Tire Size (Solid Non-marking)	381 x 127 mm (1'3" x 5")

POWER	
Battery	24 V / 225 Ah
Lithium Battery (Optional)	24 V / 173 Ah
Charger	24 V / 30 A
Lift Motor	24 V / 3.3 kW
Hydraulic System Volume	23 L (6 gal)
Hydraulic Tank Capacity	20 L (5 gal)

WEIGHT	
Overall Weight	2,200 kg (4,850 lb)

Guangxi Liugong Machinery Co., Ltd.

No. 1 Liutai Road, Liuzhou, Guangxi 545007, PR China
 T: +86 772 3886124 E: overseas@liugong.com
 www.liugong.com

10/2024 Designed by Liugong

Specifications and designs are subject to change without notice. Machines shown may include optional equipment. Liugong standard and optional equipment may vary from region to region. Please consult your Liugong dealer for information specific to your area.